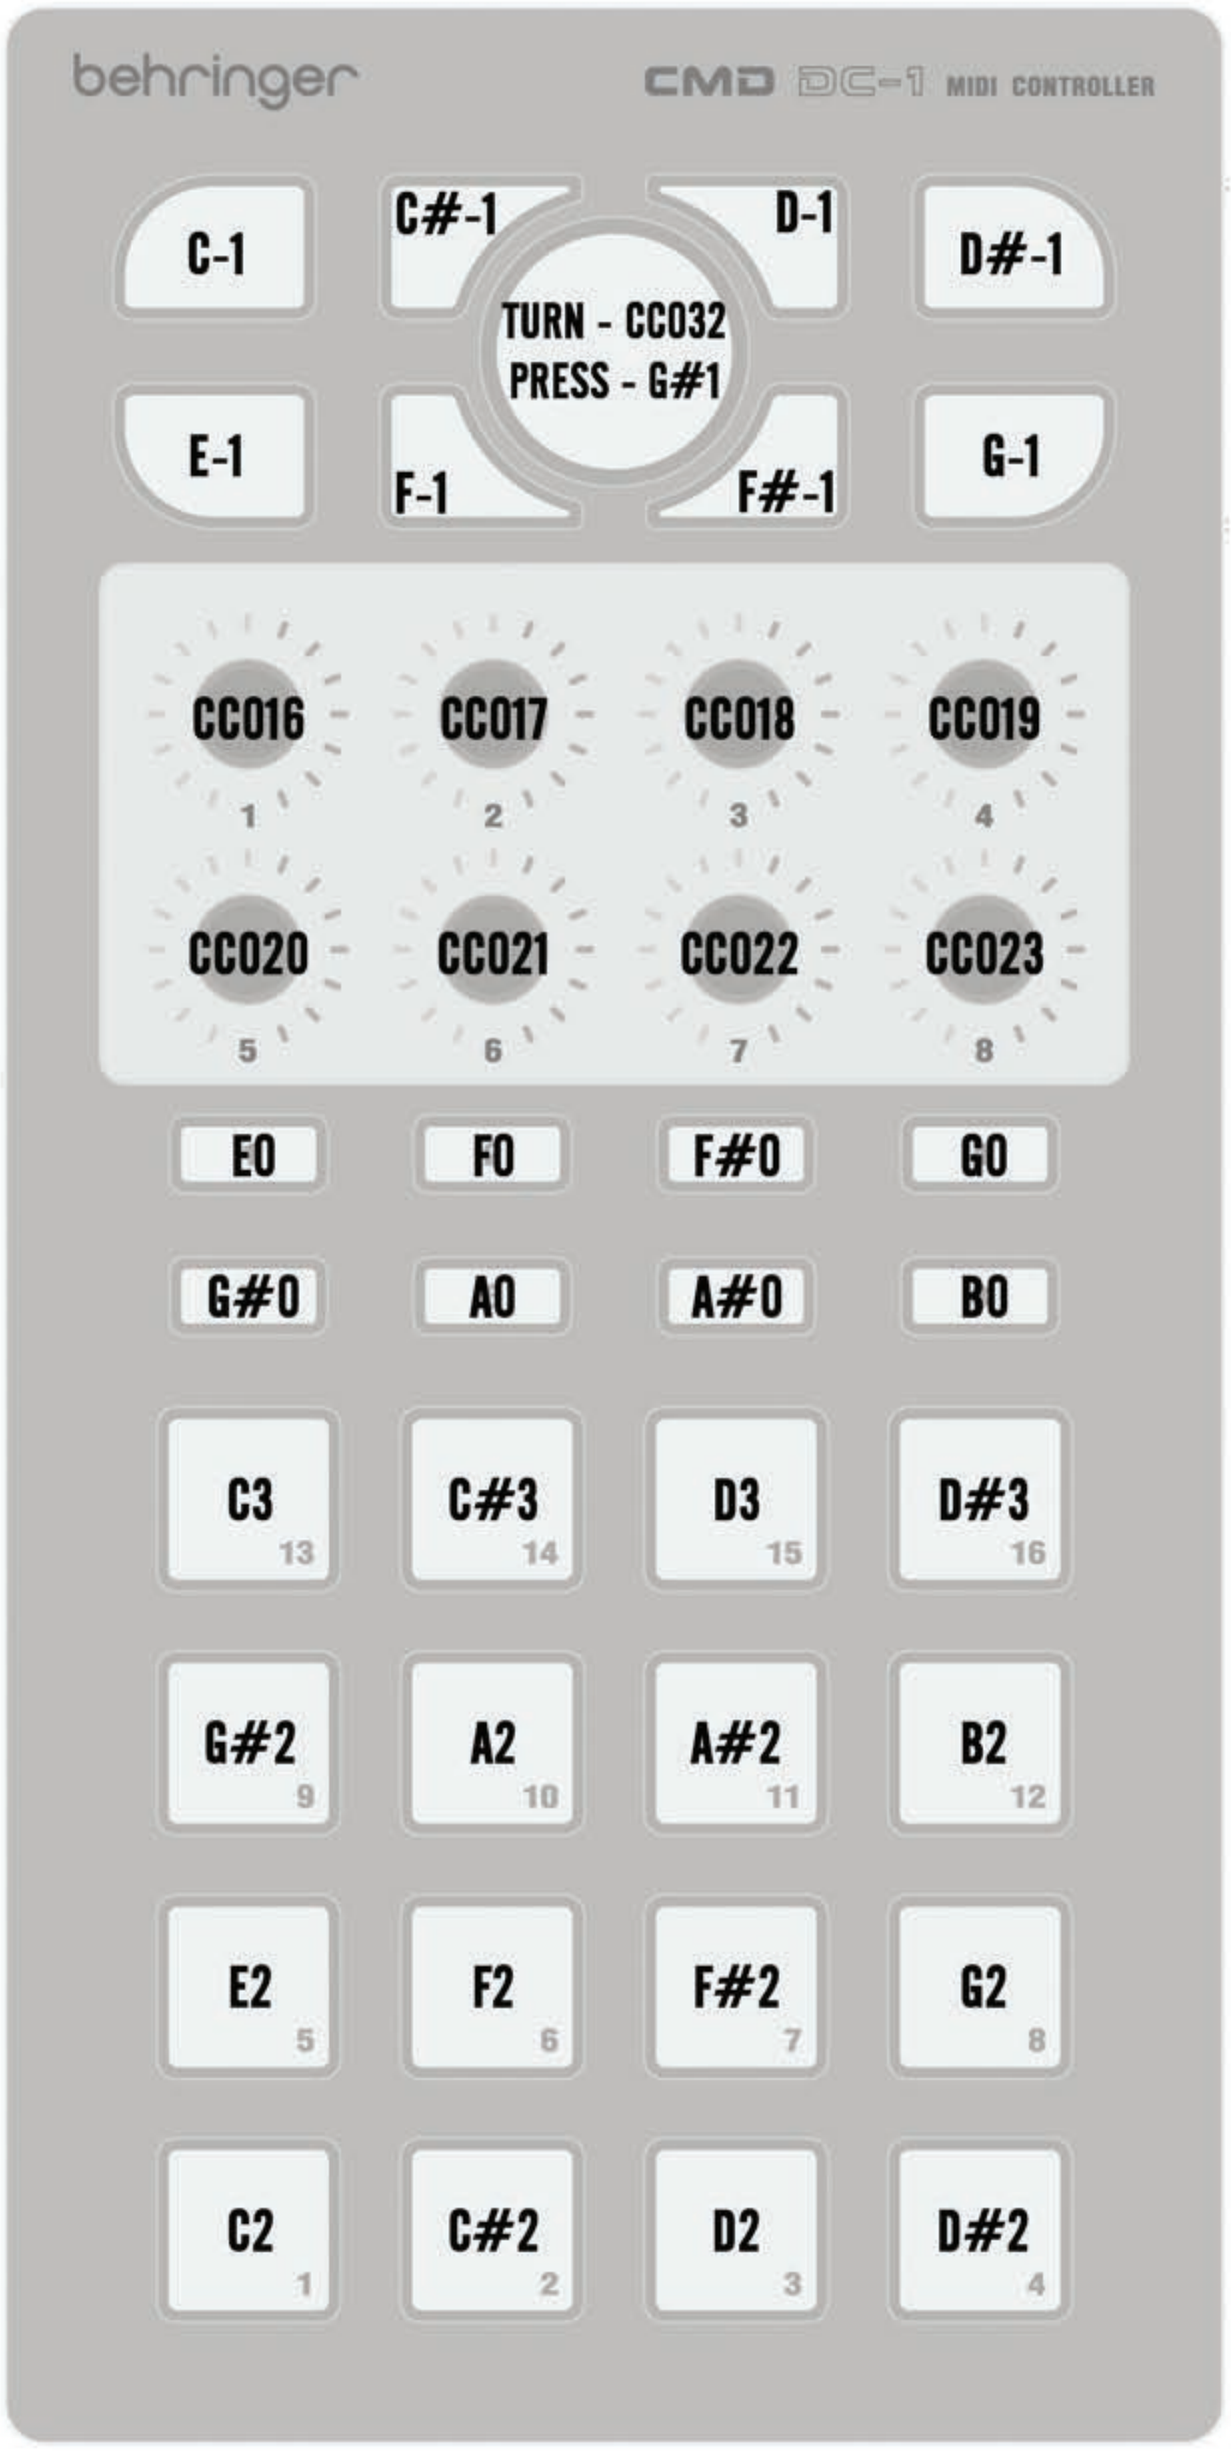

MIDI OUTPUT

BY DEFAULT, THE DC-1 SENDS MESSAGES OUT ON
ON MIDI CHANNEL 6.

LED FEEDBACK

TO DRIVE THE LED FOR A SPECIFIC CONTROL, SEND THE OUTPUT MESSAGE FOR THAT CONTROL BACK TO THE DC-1.

LAST BYTE VALUES BELOW CONTROL LED STATE.

BUTTONS - 00 - "OFF" / 01 - ON SOLID / 02 - ON BLINKING

ENCODER RINGS - RANGE IS 01 THRU 16

CMD DC-1 MIDI MAP

behringer